


# Lube Level SWICHGAGE®

L-6572B  
Revised 12-02  
Catalog Section 15  
(00-02-0057)

**FWMurphy**

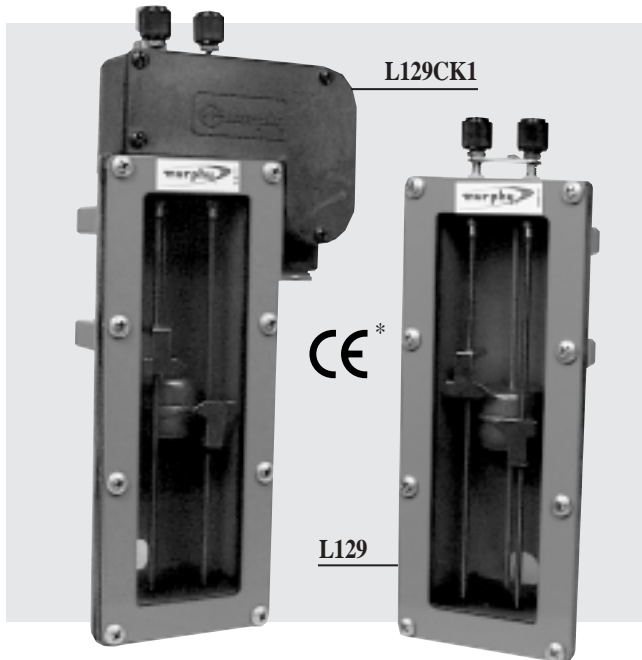

## L129 Series

- Check Lube Level Without Shutting Down
- Use On Engines, Pumps, And Compressors
- Combination Indicating Gage with Low and High Limit Switch
- Float Operated

### Description

The L129 Series Lube Level SWICHGAGE® is a combination lube level indicating gage and adjustable low and high limit switches. It provides protection against low oil level or high level caused by overfill or fuel or water seepage into the crankcase.

A 6-3/4 inch (171 mm) deep sight gauge allows you check the condition and level of your oil without shutting down the equipment.

Fingertip adjustable limit contacts, thru 4-7/8 inch (122 mm) range, make it simple to set high and low limit contacts. If the float touches the high or low limit contact, a normally open circuit will be completed which can activate alarms and/or shutdown the equipment.

There are two models in the L129 Series: L129 and L129CK1. The L129 model is designed for grounded, low voltage electrical systems. It features a one-wire-to-ground electrical circuit. The L129CK1 was designed for applications requiring a three-wire, above ground electrical circuit. It features ungrounded contacts and a conduit hub to protect electrical wiring.

### Options are available for both models.

A flow restrictor plug is available that restricts oil flow from the crankcase to the L129 Series switch and vice versa. It is typically used on applications where the engine is not stationary such as marine and mobile equipment.

The L129 Series Lube Level SWICHGAGE®, when properly installed and maintained, can monitor and protect your engines and pumps from improper lubrication level, which can result in extensive damage.

### Applications

The L129 Series is recommended for engines and pumps with larger crankcase capacity. Although designed primarily for stationary engines, the L129 Series is often used in mobile applications such as marine, rail, and some large off-highway trucks.

### Specifications

**Case:** Die Cast Aluminum.

**Lens:** Trogamid Nylon.

**Maximum Working Pressure:**

10 psi (68.9 kPa).

**Process Connection:** 1/2 NPT.

**Float Material:** Brass.

**Contact Rating:** 2 A @ 30 VAC/DC, pilot duty.

### Shipping Weight:

L129: 3 lb. (1.4 kg).

L129CK1: 3 lb. 9 oz. (1.6 kg).

### Shipping Dimensions (both models):

12 x 4-1/2 x 4-3/4 in. (305 x 114 x 121 mm).

### Warranty


A two-year limited warranty on materials and workmanship is given with this Murphy product. Details are available on request and are packed with each unit.

\* Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility except as noted.




## Dimensions

### L129

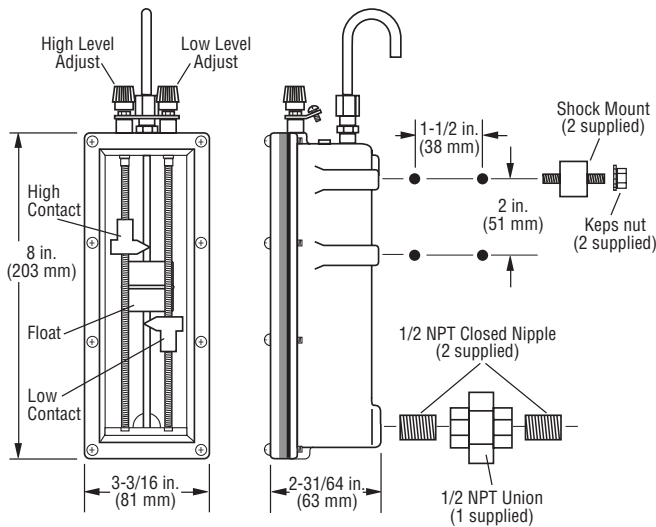


### L129CK1

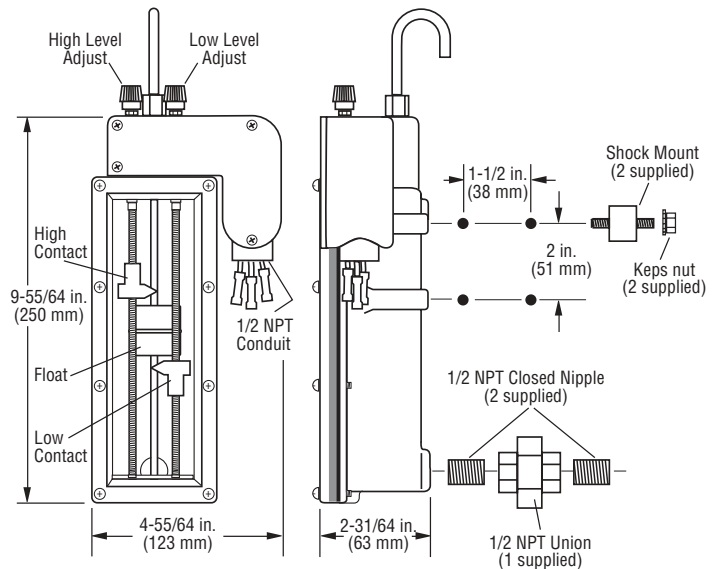

## Wiring Diagrams

These diagrams are shown with the float in the "full" position.

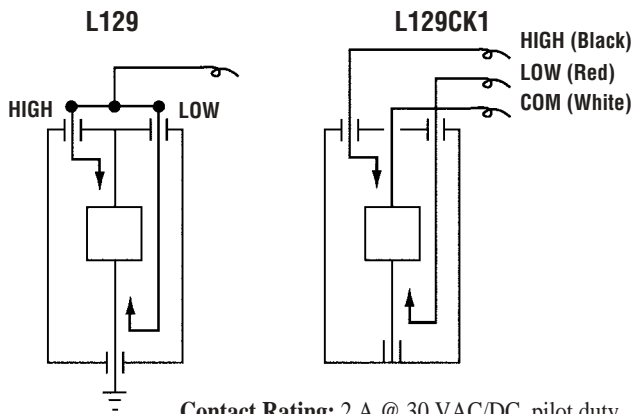

Contact Rating: 2 A @ 30 VAC/DC, pilot duty.

## Repair Kits

Specify part number.

### L129

**15000888** For units with date code T2 (Feb '98) through W6 (i.e. T3, T4, U1, U2, etc.)

**15050241** Restrictor plug

**15050245** Glass through W6 15051100 W7 & later

**15050246** Gasket through W6 15051099 W7 & later

### L129CK1

**15050241** Restrictor plug

**15050245** Glass through W6 15051100 W7 & later

**15050246** Gasket through W6 15051100 W7 & later



**FWMurphy**

P.O. Box 470248

Tulsa, Oklahoma 74147 USA

(918) 317-4100

fax (918) 317-4266

e-mail sales@fwmurphy.com

www.fwmurphy.com

### CONTROL SYSTEMS & SERVICES DIVISION

P.O. Box 1819; Rosenberg, Texas 77471; USA

(281) 342-0297 fax (281) 341-6006

e-mail sales@fwmurphy.com

### MURPHY DE MEXICO, S.A. DE C.V.

Blvd. Antonio Rocha Cordero 300, Fracción del Aguaje

San Luis Potosí, S.L.P.; México 78384

+52-444-8206264 fax +52-444-8206336

Villahermosa Office +52-993-3162117

e-mail ventas@murphymex.com.mx

www.murphymex.com.mx

### FRANK W. MURPHY, LTD.

Church Rd.; Laverstock, Salisbury SP1 1QZ; U.K.

+44 1722 410055 fax +44 1722 410088

e-mail sales@fwmurphy.co.uk

www.fwmurphy.co.uk

### MURPHY SWITCH OF CALIFORNIA

41343 12th Street West

Palmdale, California 93551-1442; USA

(661) 272-4700 fax (661) 947-7570

e-mail sales@murphyswitch.com

www.murphyswitch.com

### MACQUARRIE CORPORATION

1620 Hume Highway

Campbellfield, Vic 3061; Australia

+61 3 9358-5555 fax +61 3 9358-5558

e-mail murphy@macquarrie.com.au



In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time.

Printed in U.S.A. 850750