

Direct Mount Temperature Switch



Model TSB

- Limit Switch for Critical Temperature
- Operate Alarms or Shutdown Equipment
- SPDT Snap-Acting Switch
- Fits Most Engine Applications

Description

The TSB switch is a direct mount switch for temperature sensing. It has one limit contact that can be used to activate an alarm, actuate indicator lights or shut down equipment.

The construction of this instrument is the same as our time-proven SWICHGAGE®. A precision machined brass mounting plate and port captures a high quality stamped beryllium copper diaphragm. The single-pole, double-throw (SPDT) snap switch is operated directly from the diaphragm, for quick acting and positive switching. Trip point is factory preset according to your specifications.

Housing is weather sealed to prevent entry of moisture, dust, etc. A glass-filled nylon terminal block with quick-screw terminal connections gives the TSB switch a real advantage in industrial engine applications. The TSB is ideal when reading is not desired, but temperature is critical to operational efficiency.

Intended for use in general purpose non-classified areas.

Applications

- Engine Coolant • Irrigation Systems
- Compressors • Oil Field Systems
- Engine Lubrication
- Construction equipment
- Mobile Equipment • Marine Engines
- Generators • Electric Motors

Features

- Fits most engine applications
- SPDT snap-switch
- Activates indicator lights, alarms or shut down equipment
- Time-proven SWICHGAGE® construction
- Easy wiring terminal block
- Steel housing specially coated to resist corrosion
- Trip point is factory preset to your specifications

Specifications

Housing: Plated steel.

Connections: Popular NPT and metric (specify).

Diaphragm: Formed beryllium copper (heat treated).

Sensing Bulb: Copper.

Terminal Block: Three # 4-40 screws.

Accuracy	Switch Trip Point Range 150–295°F (66–146°C)
Trip Point	±3°F (1.7°C)
Switch Reset Differential	± 15°F (9°C)
Repeatability	±3°F (1.7°C)

Contact Rating: SPDT 3 A @ 30 VDC inductive.

Maximum Temperature: 325°F (163°C).

Factory Trip Point Setting: 210°F (99°C) Rising. Other trip point setting must be specified at time of order (see *How to Order* on reverse side).


Contact: Operates on rising or falling temperature (specify).

Shipping Weight: 10 oz (0.31 kg).

Shipping Dimensions: 4-3/4 x 4-3/4 x 2-5/8 in. (121 x 121 x 67 mm).

NOTE: No customer replacement parts.

Dimensions

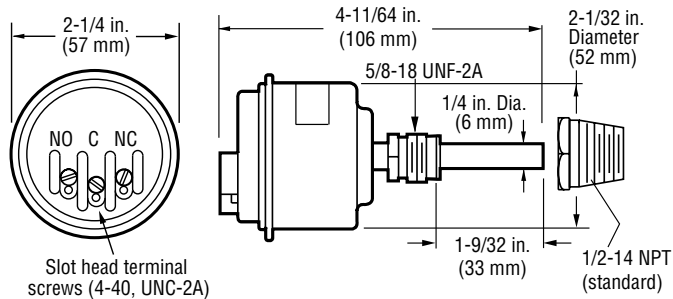

How to Order

To order the TSB model use the diagram below.

TSB – R230 – 3/8

Standard Switch Trip Point

Specify "R" for trip point on rising temperature and "F" for trip point on falling temperature followed by the trip point value.
Example: TSB-R200; TSB-F160. All settings specified in °F.

Standard Switch Trip Point Values (rising)*

165	= 165°F (74°C)
180	= 180°F (82°C)
200	= 200°F (93°C)
205	= 205°F (96°C)
210	= 210°F (99°C)
220	= 220°F (104°C)
225	= 225°F (107°C)
230	= 230°F (110°C)
240	= 240°F (116°C)
250	= 250°F (121°C)

* Non standard trip points require a minimum quantity order.
Trip point must be in 5°F increments between 150–295°F (66–146°C).

Connection Size

Blank	= 1/2-14 NPT**	10-05-0131**
1/4	= 1/4-18 NPT	10-05-0167
3/8	= 3/8-18 NPT	10-05-0069
5/8	= 5/8-18 UNF	10-05-0068
3/4	= 3/4-14 NPT	10-05-0105
7/8	= 7/8-9 UNC	10-05-0093
3/8B	= 3/8-19 BSPT	10-05-0284
1/2B	= 1/2 BSPT	10-05-0330
M14	= 14 mm x 1.5 [†]	10-05-0104 [†]
M16	= 16 mm x 1.5 [†]	10-05-0514 [†]
M18	= 18 mm x 1.5 [†]	10-05-0399 [†]
M20	= 20 mm x 1.5 [†]	10-05-0670 [†]
M22	= 22 mm x 1.5 [†]	10-05-0606 [†]
M24	= 24 mm x 1.5 [†]	10-05-0907 [†]


** Standard connection.

[†] Includes copper seal.

Installation Instructions

Mounting

1. The TSB can be mounted in horizontal or vertical angles (**do not mount the switch facing down**).

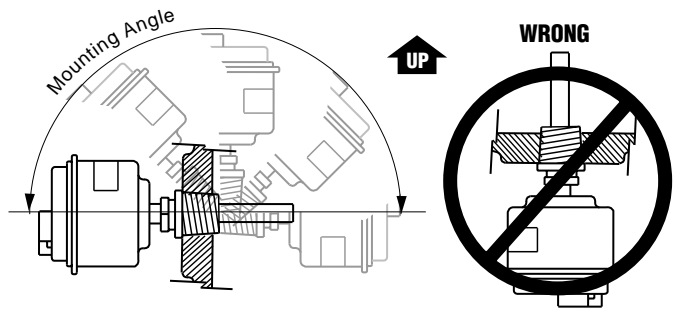


2. Install the TSB switch in the engine water jacket location recommended by the engine manufacturer.
3. Install the appropriate adapter nut into the engine water jacket. Use thread sealant such as Teflon® tape as necessary.
4. Insert the sensing bulb through the adapter nut. The sensing bulb must be fully immersed in coolant/liquid flow so liquid flows across the sensing bulb.
5. Tighten the 5/8-18 UNF-2A compression nut to complete a liquid tight seal.

Wiring

CAUTION: DISCONNECT Electrical Power before wiring.

1. See wiring schematic below. Switch contacts are shown with no temperature applied to the TSB switch.

2. A spade (forked) terminal is recommended for all TSB switch connections.
3. Complete the wiring operation making sure the voltage and current requirements are within the TSB switch electrical rating.



Teflon is a trademark of Dupont.

Warranty

A two-year limited warranty on materials and workmanship is given with this Murphy product. Details are available on request and are packed with each unit.



FWMurphy

P.O. Box 470248

Tulsa, Oklahoma 74147 USA
(918) 627-3550

fax (918) 664-6146

e-mail sales@fwmurphy.com

www.fwmurphy.com



Printed in U.S.A.

CONTROL SYSTEMS & SERVICES DIVISION

P.O. Box 1819; Rosenberg, Texas 77471; USA
(281) 342-0297 fax (281) 341-6006
e-mail sales@fwmurphy.com

MURPHY DE MEXICO, S.A. DE C.V.

Blvd. Antonio Rocha Cordero 300, Fracción del Aguaje
San Luis Potosí, S.L.P.; México 78384
+52-48-206264 fax +52-48-206336
e-mail ventasmex@murphymex.com.mx

FRANK W. MURPHY, LTD.

Church Rd.; Laverstock, Salisbury SP1 1QZ; U.K.
+44 1722 410055 fax +44 1722 410088
e-mail sales@fwmurphy.co.uk
www.fwmurphy.co.uk

For Service in French:

Pour service en français:

+44 1722 410697 fax +44 1722 410088
e-mail france@fwmurphy.co.uk
www.fwmurphy.co.uk/francais.htm

MURPHY SWITCH OF CALIFORNIA

41343 12th Street West
Palmdale, California 93551-1442; USA
(661) 272-4700 fax (661) 947-7570
e-mail sales@murphyswitch.com
www.murphyswitch.com

MACQUARRIE CORPORATION

1620 Hume Highway;
Campbellfield, Vic 3061; Australia
+61 3 9358-5555 fax +61 3 9358-5558
e-mail murphy@macquarrie.com.au